

Basic Online Download Pattern 502C Trousers/Pants from burdafashion.com – Instructions

Burda sizes 34, 36, 38, 40, 42, 44

Upper edge is approx. 3 cm (1¼") above waistline.

Side length from waist: 67 cm (26½")

Lower leg width approx. 41 cm (16¼")

Materials:

140 cm (55") elastic fine gabardine with crosswise stretch: 1.40 m (1½ yds) for all sizes.

Vilene/Pellon G 785 interfacing

1 trouser/pant zipper:

Sizes 34, 36, 38, 40: 16 cm (6½") long

Sizes 42, 44: 18 cm (7") long

3 large buttons, 1 small inside button.

Recommended fabric: suitable for elastic trouser/pant fabrics only. The finished garment must stretch crosswise.

Paper Pattern, DIN A 4 Print-out:

The pattern pieces for this style will print onto 15 sheets of DIN A4 paper, each with a thin frame. Wait until all sheets have been printed. Arrange the sheets in the right order as shown on the extra sheet with the print-out overview.

Beginning with the sheet in the lower lefthand corner, trim off the upper and right-hand edges of each along the thin frame line. Then tape the sheets together, exactly matching the frame lines.

Choose your pattern size according to the Burda size chart: jackets, coats and blouses according to your bust size, trousers/ pants and skirts according to your hip size.


Should your measurements differ from those on the size chart, choose the size that comes closest and then alter the pattern pieces accordingly.

Then cut out the pattern pieces along your size lines which are seamlines. Seam allowances are added when cutting out!


Cutting layout

Sizes 34 – 44

Fine gabardine w. crosswise stretch,
140 cm (55") wide



Cut from doubled fabric layers folded right sides together.



Zipper topstitching line is printed on pattern piece 1 for size 34 only. For the remaining sizes, draw in the line at the same distance from centre front line for your size as for size 34, paying careful attention to placket length.

Tab placement lines are printed on pattern piece 22 for size 34 only. For all draw in line at the same distance from seamlines for your size as for size 34.

Cutting out:

Pin pattern pieces onto your fabric as shown on the cutting layout printed below, making sure that the grain direction arrow printed on each piece is exactly parallel to fabric fold and/or selvages.

Seam and hem allowances:

Add 4 cm (1⅝") on hem edges, 1.5 cm (⅝") on all other seams and edges.

Fine gabardine

1 Trouser/pant front	2x
3 Hip yoke+pocket pouch	2x
4 Trouser/pant back	2x
19 Pocket	2x
20 Centre front yoke piece	4x
21 Side front yoke piece	4x
22 Centre back yoke piece	4x
23 Side back yoke piece	4x
24 Right fly facing	1x
25 Left fly underlap	2x
26 Front flap	2x
27 Tab	6x


Interfacing

Cut out to match shaded pieces shown on cutting layout. Iron onto wrong side of fabric, interfacing pieces for only one (outer) yoke layer and only one flap layer.

Trace seamlines and markings onto fabric:

Place interfaced pieces onto corresponding non-interfaced pieces, right sides together. Pin pattern piece back onto fabric. Transfer all pattern piece outlines, i.e. seam- and hemlines, as well as all lines and markings except grainline arrows

Pattern pieces 1, 3, 4 and 19 to 27

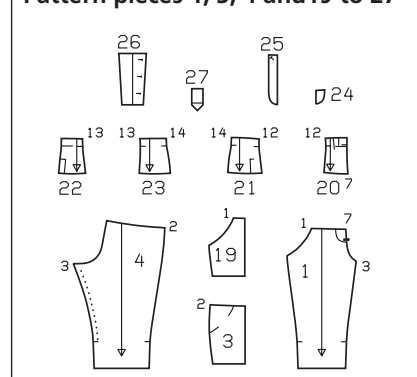

onto the wrong side of garment pieces using burda dressmaker's carbon and a tracing wheel (see carbon paper packet for detailed instructions). Then mark centre front lines, fold and placement lines onto the right fabric side with lines of hand basting.

Construction:

Please note: When basting and stitching a seam, fabric layers should lie right sides together unless otherwise stated. Secure seam ends with backstitching.

■ **Stretch edges:** place back trouser/pant pieces right sides together. Stretch the inside leg edges above the knee marker line with a steam iron or under a damp pressing cloth until they match the inside leg edges on front trouser/pant pieces.

■ **Pockets:** overcast the allowance on front and lower pocket edges, press to wrong side. Pin the right side of pockets onto the wrong side of front trouser/pant pieces, stitch into place along curved (pocket opening) edges. Trim seam allowances. Turn pockets to the right side, press, edgestitch and topstitch 7 mm (¼") along seamed (pocket opening) edges. Baste pockets onto fronts. Overcast allowance on front and lower edges of hip yokes. Pin wrong side of fronts onto right side of hip yokes so that pocket opening edges lie on placement lines. Baste hip yokes into place to match pocket edges. Edgestitch and topstitch pockets 7 mm (¼") along front and lower edges, securing hip yokes.

■ **Side seams:** stitch side seams. Overcast allowances together and press into front pieces, topstitch into place very close to seams. Then topstitch pockets 7 mm (¼") along side edges.

■ **Inside leg seams:** stitch inside leg seams in trousers/pants and lower leg sections. Overcast and press open seam allowances.

■ **Centre back/crotch seam:** insert one leg into the other, right sides together, matching side as well as inside leg seams. Pin and stitch front crotch seam from zipper mark to inside leg seams, continue and stitch centre back seam. Overcast seam allowances, press open from upper back edge down to curve. Overcast allowance on left front zipper edge.

■ **Yoke:** stitch interfaced (outer) layer together at front and back section seams, centre back and side seams. Press open side seam allowances, press section seam allowances toward centre front or back, press centre back seam allowances into right back section. Topstitch narrowly along seams, securing allowances. Pin and stitch yoke to upper trouser/pant edge, right sides together, matching side seams.

■ **Yoke lining/Front fly zipper:** stitch side, section and centre back seams in non-interfaced yoke layer, press open seam allowances. Overcast curved long edge on right fly facing. Stitch facing to lower edge of inner yoke layer, right sides together, press open seam allowances. Pin yoke layers right sides together, matching side seams. Pin right ends together and facing to right placket edge. Stitch edges together from upper edge down to zipper mark. Trim seam allowances. Turn facing to wrong side, turn yoke right side out, press seamed edges. On left front end of yoke and left placket edge press allowance to the wrong side 5 mm (a scant $\frac{1}{8}$ ") from centre front line. Beginning at marker line on yoke, pin left half of zipper under left placket and yoke edge so that teeth are visible, edgestitch into place. Pin placket closed, centre-on-centre. Pin and stitch right half of zipper to right placket facing and inner yoke layer, taking care not to catch in trouser/pant front.

Stitch fly underlap pieces right sides together along upper end and curved long edge. Turn, press. Overcast open long edges together. Beginning at seamline marked on upper yoke edge, pin straight edge of underlap under left half of zipper. Stitch placket allowance to underlap, stitching very close to zipper stitching.

Turn yoke wrong side out again. Pin and stitch layers together along upper edge. Trim seam allowances.

Turn yoke right side out, baste and press seamed edges. Turn under left front end of inner yoke layer and hand-sew onto fly underlap along attachment seam. Baste right yoke end and fly facing into place. Baste lower edge of inner yoke layer into place over outer layer attachment seam.

Topstitch along right placket edge as marked from upper edge down to 3 cm ($1\frac{1}{4}$ ") above end, taking care not to catch in underlap. Close zipper. Continue topstitching down to placket end, catching in underlap. Beginning at zipper topstitching line, edgestitch and topstitch yoke 7 mm ($\frac{1}{4}$ ") along attachment seam, securing inner layer.

Work buttonhole into fly underlap. Sew button onto inner yoke layer to match, taking care that stitches are not visible on right side of garment.

■ **Tabs:** for each tab stitch 2 pieces right sides together, leaving straight end open. Trim seam allowances. Turn tabs, press, edgestitch and topstitch 7 mm ($\frac{1}{4}$ ") along seamed edges. Overcast open end of each closed, turn to underside, press. Pin tabs onto place over centre back seam and front pockets so that the crosswise stitching line on each lies exactly on yoke attachment seam. On each tab carefully remove pin without shifting tab position, fold tab upward, stitch straight end into place exactly in the pressed crease. Fold tab back downward, stitch into place along crosswise stitching line.

■ **Front flap:** stitch flap pieces right sides together along outer edges, leaving 5 cm (2") open in one edge for turning. Trim seam allowances, trim corners diagonally. Turn flap right side out, press all edges. Edgestitch and topstitch 7 mm ($\frac{1}{4}$ ") along upper, left and lower edges of flap, stitching turning gap closed. Worked buttonholes into left edge of flap where marked. Pin flap onto yoke and front trousers/pants, centre-on-centre, edgestitch and topstitch right edge 7 mm ($\frac{1}{4}$ ") into place.

■ **Hems:** turn up lower leg edges twice (finished hem width 3 cm/ $1\frac{1}{4}$ "), press, topstitch into place.

BURDA MEASUREMENT CHART

STANDARD WOMEN'S SIZES height 168 cm (5'6")

Burda size		34	36	38	40	42	44	46	48	50	52
Bust	cm	80	84	88	92	96	100	104	110	116	122
Waist	cm	62	66	70	74	78	82	86	92	98	104
Hips	cm	86	90	94	98	102	106	110	116	122	128
Front waist length	cm	43	44	45	46	47	48	49	50	51	52
Bust point	cm	25	26	27	28	29	30	31	32	33	34
Back waist length	cm	41	41	42	42	43	43	44	44	45	45
Back width	cm	33.5	34.5	35.5	36.5	37.5	38.5	39.5	41	42.5	44
Shoulder width	cm	12	12	12	13	13	13	13	14	14	14
Sleeve length	cm	59	59	60	60	61	61	61	61	62	62
Upper arm width	cm	26	27	28	29	30	31	32	34	36	38
Neck width	cm	34	35	36	37	38	39	40	41	42	43